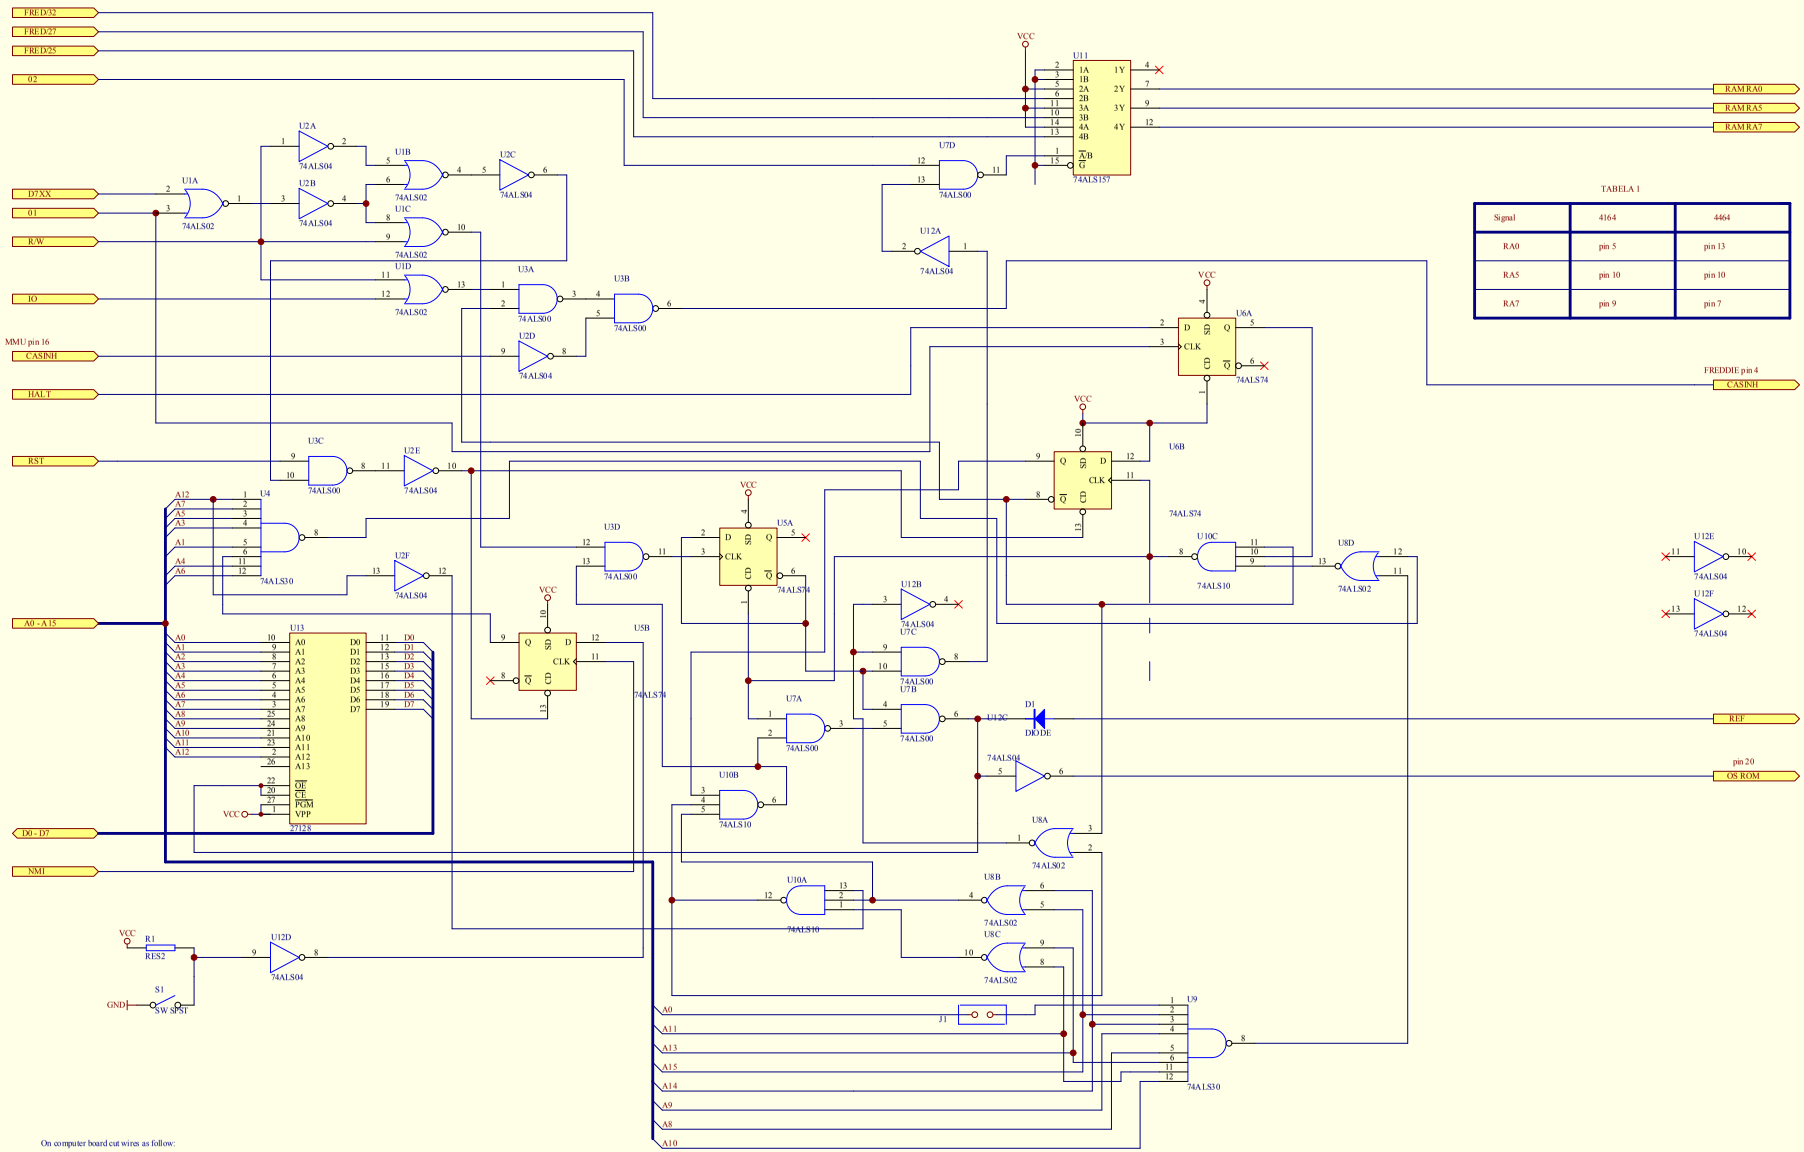

TABELA 1

Signal	4164	4464
RA0	pin 5	pin 13
RA5	pin 10	pin 10
RA7	pin 9	pin 7

On computer board cut wires as follow:

1. between pin 20 and pin 22 OS ROM (U5)
2. between 25, 27, 32 of FREDDIE (U6) and RAM (see Table 1)
3. between pin 4 of FREDDIE (U6) and pin 16 of MMU (U3)

Na plycie przeciac sciezki:

1. miedzy pin 20 a 22 OS ROM (U5)
2. miedzy pinami 25, 27 i 32 ukladu FREDDIE (U6) i pamiecia RAM (patrz Tabela 1)
3. miedzy FREDDIE (U6) pin 4 a MMU (U3) pin 16

Title		
Size: Orcad C	Number	Revision
Date: 13-Apr-2010		Sheet of
File: C:\Documents and Settings\Candle\Moje dokumenty\elmetnik\C3 freez.DDB		Drawn By: