

**Atari® MEGA STE™ 1.44
Megabyte Floppy Drive
Installation Manual**

Reproduction of all or any portions of this manual is not allowed without the specific written consent of Atari Corporation.

Every effort has been made to ensure the accuracy of the product documentation in this manual. However, because Atari Corporation is constantly improving and updating its computer hardware and software, it is unable to guarantee the accuracy of printed material after the date of publication and disclaims liability for changes, errors, or omissions. These documents are for repair service information only. Part numbers are for reference only. Only parts on current dealer parts lists are available. No license is given for any use by the possession of these documents and may not be reproduced in any form without the written approval of Atari Corporation.

Atari, the Atari logo, TOS, and MEGA STE are trademarks or registered trademarks of Atari Corporation.

Copyright 1991, Atari Corporation
Sunnyvale, CA 94089-1302
All rights reserved.

Atari® MEGA STE™ 1.44MB Floppy Disk Installation Manual

Kit Contents

Your Atari MEGA STE 1.44 Megabyte Floppy Disk kit P/N CA401229-001 should contain the following items:

- AJAX Disk Controller Chip Part Number: C302096-001
- PAL Chip UA2 Part Number: C301901-002
- 2MB 3½" Floppy Disk Drive Part Number: C301371-001
- Installation Manual Part Number: C302953-001
- TOS ROM Rev 2.06 Part Number: CA401187-001

If any of these components are missing from your kit please contact the outlet from which the kit was ordered.

Tools Required:

- Phillips screwdriver.
- Flat blade (slotted) screwdriver

Installation

The following steps should be completed in the following order to install the 1.44 Megabyte floppy drive in your Atari MEGA STE computer. Carefully read each step all the way through before taking any action required by that step.

WARNING

This installation should be performed in a static free environment. Static can cause damage to the components in this kit. Failure to perform each step completely or skipping steps could result in damage to the floppy drive, electrical components, or your computer.

1. If a Hard Disk is installed in the computer, remove it.
2. Remove the top cover from the computer.
3. Locate and remove the Floppy Disk Controller Chip at location U405. Replace it with the AJAX chip part number C302096-001.
4. Locate and remove the PAL chip at location UA2.
5. If the main PCB is lower than a REV B, remove the main PCB and add a jumper wire in the solder side of the board from U7 pin 32 to UA2 pin 19. Replace the main PCB.
6. Replace the PAL that was in socket UA2 with the PAL chip part number C301901-002 included in the upgrade kit.
7. If the TOS ROMs in the computer are lower than REV 2.06, replace them with the REV 2.06 TOS ROMs part number CA401187-001.
8. Locate switch S701 on the main PCB and turn segment 7 on.
9. Set the jumpers on the rear of the 1.44 megabyte floppy drive to 1-2, 5-13, and 14-15. See Figure 1.

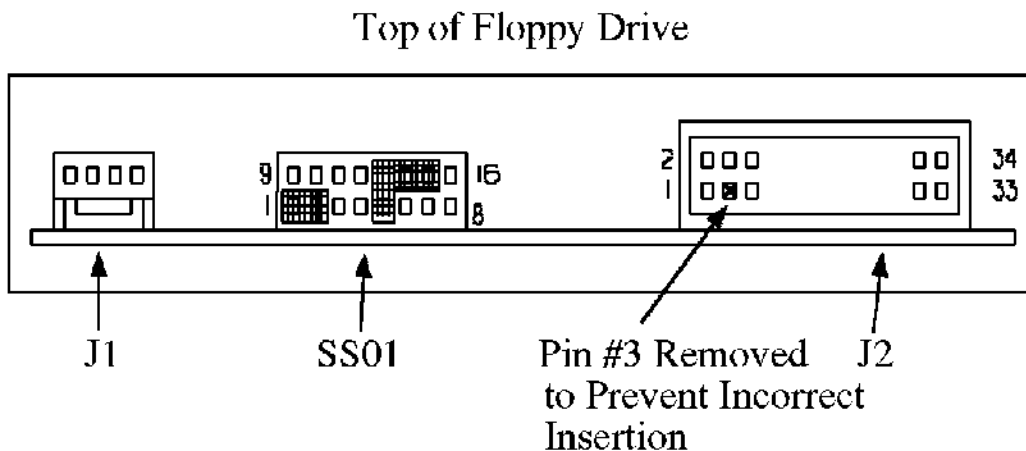


Figure 1

10. Remove the old 720KB floppy drive from the top cover and replace it with the 1.44 megabyte floppy drive part number C301371-001.

11. Plug the floppy drive interface cable into J2 of the floppy drive.

NOTE

Pin 1 is in the opposite position of pin 1 on the 720KB floppy drive.

12. Plug the power cable into J1 on the 1.44 megabyte floppy drive.

13. Replace the top cover.

14. If you removed a Hard Disk from the computer, replace it.

Notes

Copyright 1991, Atari Corporation
Sunnyvale, CA 94089-1302
All rights reserved.



Printed in Taiwan
C302953-001 REV. A